

3,0-3,5 t

ROUGH TERRAIN FORKLIFT



Main features:

- Widely used in mine fields, orchards, Construction site and other fields.
- Differential Lock.
- Higher ground clearance, the angle of the Mast is up to 10° (F)/ 12° (R), Guarante to pass well.
- Strong power, large climbing slope, high speed, with domestic and foreign well-known brands of engine
- Equipped with super wide cross country tires, off-road performance is good.
- High exhaust is standard configuration, ensure the working environment is good

HELI
LIFTING THE FUTURE





TOP1 FORKLIFT MANUFACTURER AND SELLER
IN CHINA FOR CONSECUTIVE 25 YEARS

ROUGH TERRAIN FORKLIFT 3-3,5 t

Main performance parameters of 3-3.5 t ROUGH TERRAIN FORKLIFT

Parameters		Type	CPCD30-W1Y	CPCD35-W1Y
Load capacity		kg	3000	3500
Lift height		mm	3000	3000
Load centre distance		mm	500	500
Free lift		mm	150	150
Wheels, number front/rear (x=driven)			2x/2	2x/2
speed	Forward	km/h	20	20
	Backward	km/h	20	20
Turning radius		mm	3265	3265
Ground clearance (without load)		mm	270	270
Total length		mm	4144	4144
Overall width		mm	1550	1550
Overall height(mast)		mm	2325	2325
Wheelbase		mm	1900	1900
Track width, front		mm	1160	1160
Track width, rear		mm	1100	1100
Fork adjustment distance		mm	250 ~ 1435	250 ~ 1435
Service weight		kg	5050	5050
Load distance, centre of drive axle to fork		mm	644	644
Rear overhang		mm	530	530
Mast Tilt angle F/R		°	10/12	10/12
Max drawbar pull, laden		N	16500	16500
Gradient performance with load		%	18%	18%
braking distance (without load)		m	≤5	≤5
Engine	Model		ISUZU4GJ2	ISUZU4GJ2
	Rated Power/Rated Speed		Kw/rpm	46/2450
	Max.Torque/Rated Speed		Kw/rpm	186.2/1600
Tyre	Tyre size, front	size	15-19.5TL	15-19.5TL
		pressure	Mpa	0.48
	Tyre size, rear	size	10-16.5-8PR	10-16.5-8PR
		pressure	Mpa	0.41

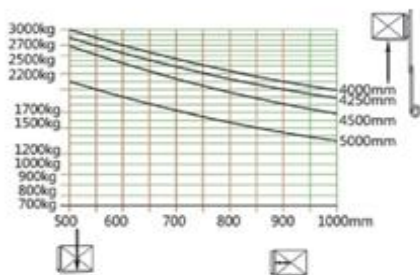

ANHUI HELI CO., LTD.

ADD:NO.668Fangxing Street,Economical Development Zone,Hefei,P.R.China

TEL:(86 551)63639068,63639258,63639358,63662105

FAX:(86 551)63639966

WEBSITE:<http://www.helichina.net>

Email:heli@helichina.net

AUTHORIZED DEALER

*Details of specifications and equipment are based on information available at time of printing and may change without notice.